

# MASCARILLA FFP2-NR KADI BIOLOGICAL







CAJA DE 20 UNIDADES


BLISTER INDIVIDUAL  
REUTILIZABLE - PORTA MASCARILLA





INSTRUCCIONES  
Y ESPECIFICACIONES TECNICAS  
EN CASTELLANO

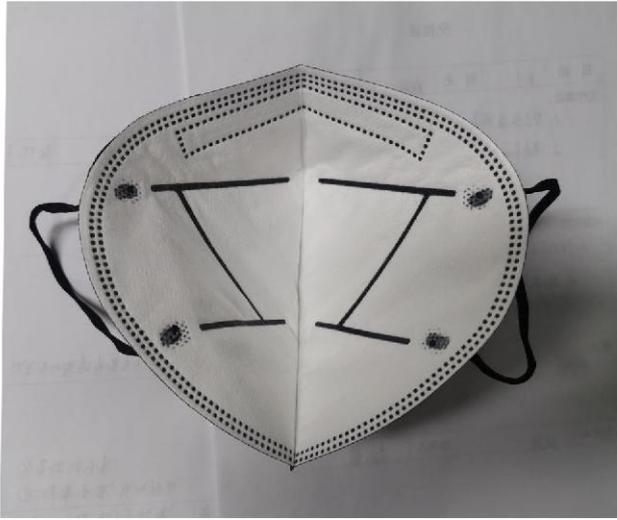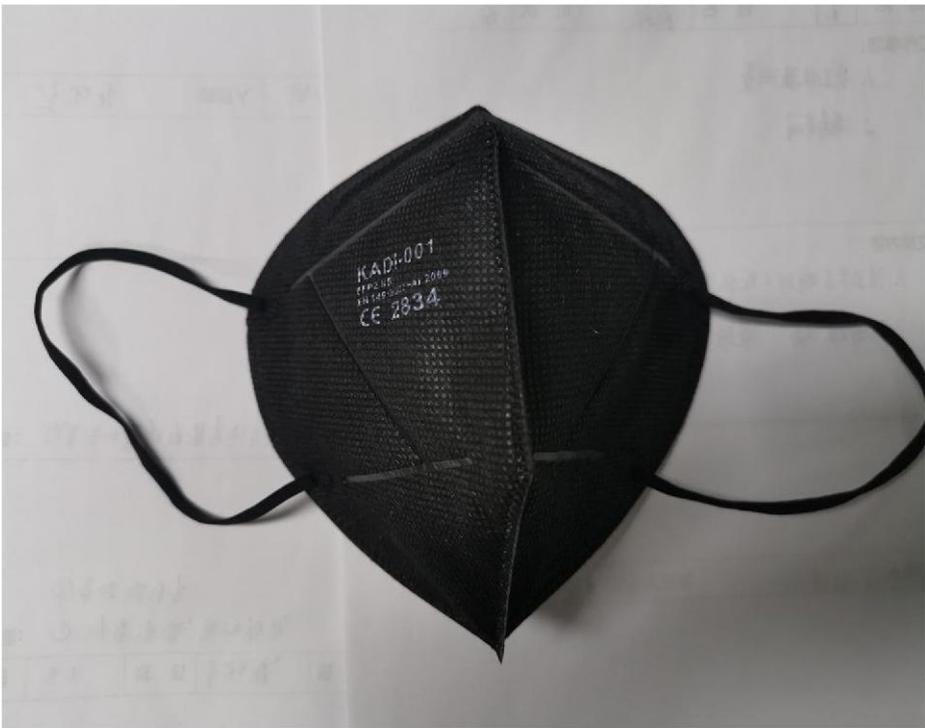

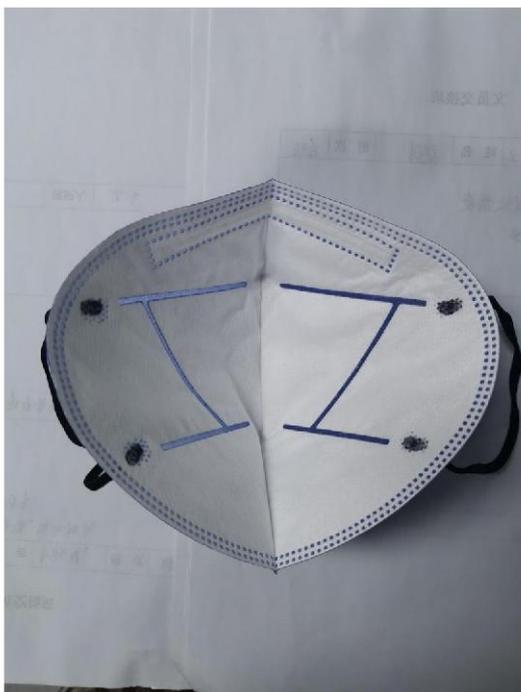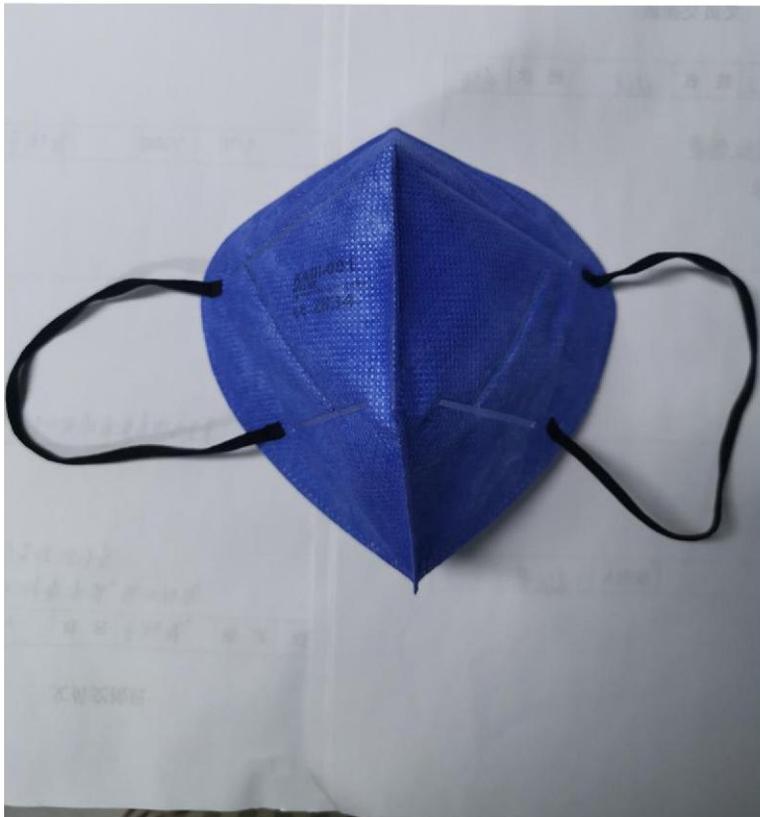

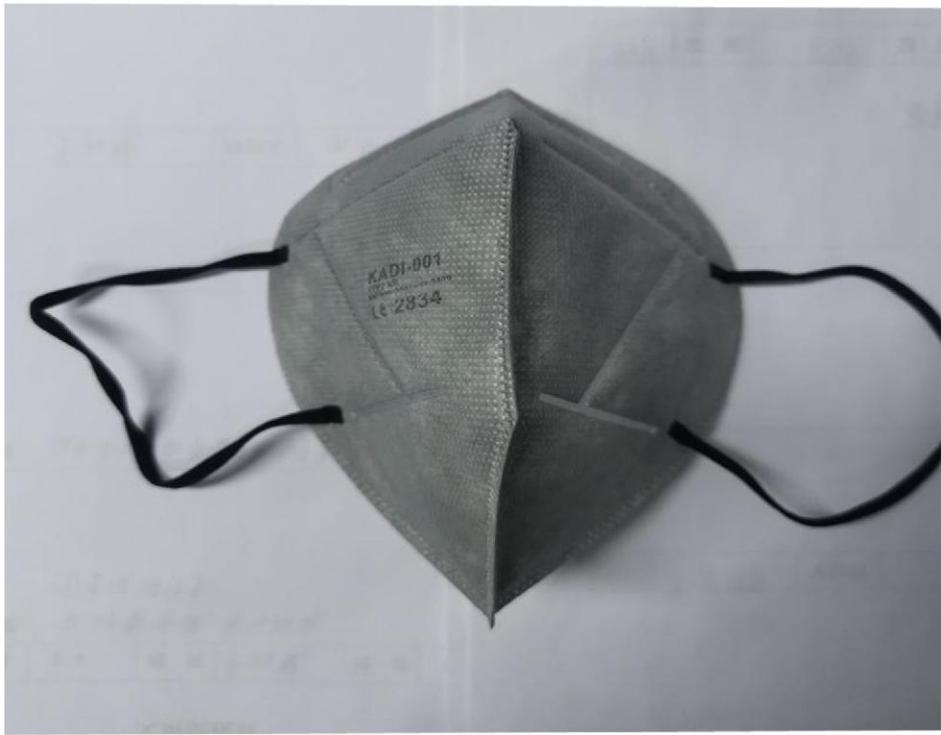

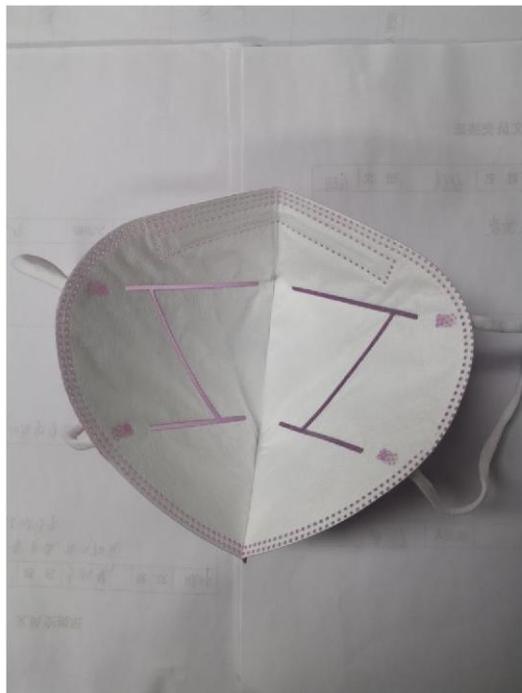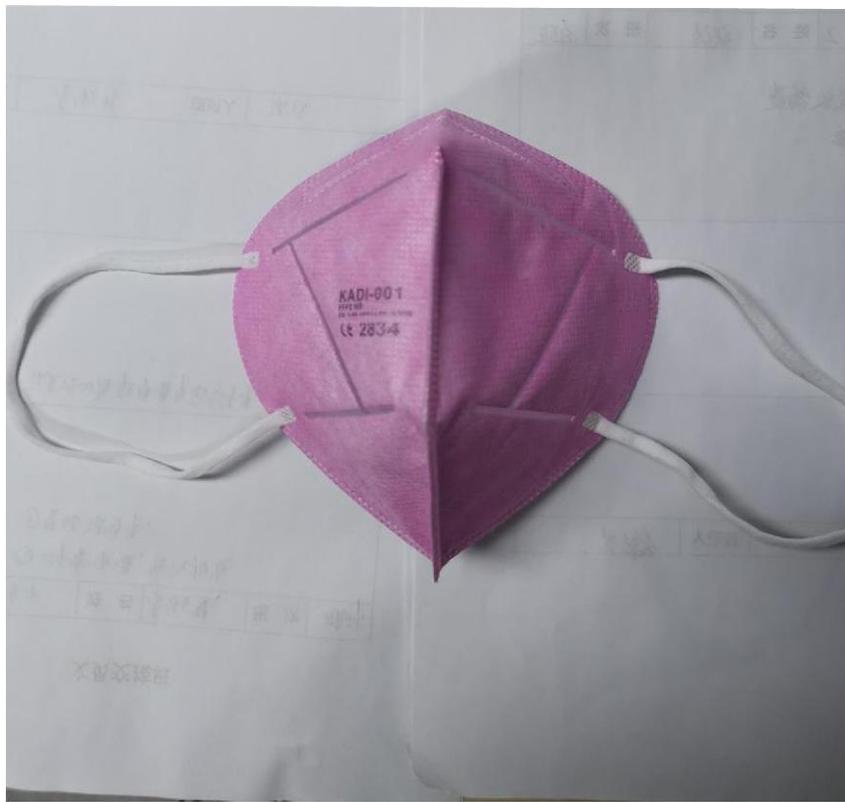

# FICHA TÉCNICA

## MASCARILLA DE PROTECCIÓN INDIVIDUAL

### FFP2

#### DESCRIPCIÓN Y COMPOSICIÓN

- Referencia KADI 001 FFP2
- Mascarilla con filtro N95
- Fabricada en poliéster
- Forma de cono
- Filtro de partículas micrométricas N95
- Doble banda elástica de sujeción
- Desechable
- No Estéril
- Libre de látex

#### CARACTERÍSTICAS

- Tipo de **protección**  $\geq 95$  (BFE %)
- Máscara **resistente** a la obstrucción en el tiempo (prueba por polvo de Dolomita) que mejora la comodidad de uso.
- **Protección:** Aerosoles sólidos y líquidos (como neblinas de aceite) no tóxicos, de toxicidad media-baja y de alta toxicidad.
- Partículas virales /orgánicas COVID 19
- Fuga hacia el interior total: Satisfactorio
- Contenido de CO2 en el aire de inhalación: Satisfactorio
- Resistencia a la inhalación: Satisfactorio
- Libre de colofonia



### NORMA EU/ESP

UNE-EN 149:2001+A1:2010



ORGANISMO NOTIFICADO  
Nº2834

FILTRACIÓN BACTERIANA (BFE) (%)

**95**

RESPIRABILIDAD (Pa/m<sup>2</sup>)

**28PA/Cm<sup>2</sup>**

EFICACIA DE FILTRACIÓN DE AEROSOLES

**96%**

EFICACIA DE FILTRACIÓN DE PARTICULAS

**95%**

AJUSTE FACIAL

**>97%**





## Module B EU Type-Examination Certificate

For the requirements of PPE Regulation 2016/425

Certificate No.: CE-PC-200401-179-01-9C

<b>Certificate holder:</b>	<b>Hefei Kadi Biological Pharmaceutical Co., Ltd.</b> 2nd Floor, No.3 Building, Workshop 3, Xiwei San Rd., Feidong Economic Development Zone, 231600, Hefei, Anhui, China
<b>Product:</b>	<b>Particle filtering half mask</b> Detailed product description listed in the Annex
<b>Model(s):</b>	KADI-001
<b>Standard(s):</b>	EN 149:2001+A1:2009 Respiratory protective devices - Filtering half masks to protect against particles - Requirements, testing, marking
<b>Issue date:</b>	2020-06-12
<b>Revision date:</b>	2020-11-20
<b>Expiry date:</b>	2021-06-11

The product(s) on this certificate and the Technical File have been assessed and found to be in conformance with the applicable Essential Health and Safety Requirements in Annex II of the PPE regulation 2016/425.

Any changes to the design, manufacturing location or manufacture of the PPE product certified here must be advised to CCQS Certification Services Limited for review.

CE marking shall not be applied until the requirements of all the PPE Regulation 2016/425 and relevant EN Harmonised standards and/or Technical specifications have been met.

If the certified product is Category III then this certificate is only valid if used in conjunction with Conformity Assessment against Module C2 or Module D.

This certificate remains the property of CCQS and maybe withdrawn at any time if it is considered that the equipment is no longer in conformity with the requirements of the PPE Regulation 2016/425.



Approved by Ireland  
Government  
as a Notified Body  
for CE Marking No.2834



### CCQS Certification Services Limited

Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin15,  
D15 AKK1, Ireland

Tel: +00 353 1 588 6920 Website: [www.ccqs.co.uk](http://www.ccqs.co.uk) E-mail: [verify@ccqs.ie](mailto:verify@ccqs.ie)

If in any doubt about the integrity of this certificate, please contact CCQS by email to verify.



# Module B EU Type-Examination Certificate

## Annex

For the requirements of PPE Regulation 2016/425

Certificate No.: CE-PC-200401-179-01-9C

**Applicable standards and specification:**

EN 149:2001+A1:2009 Respiratory protective devices - Filtering half masks to protect against particles - Requirements, testing, marking

Model reference	Product description
<b>KADI-001</b>	Folding filtering half mask fitted with ear loops with head harness clip, no valves, internal metal nose clip Mask body color: White, Black, Grey, Yellow, Dark blue, Purple, Pink Classification: FFP2 NR Test report No.: 2020(D) - 0778

Certificate Revision	Revision date	Revision details
A	2020-06-12	Initial issue
B	2020-09-11	Certificate validity extended to one year
C	2020-11-20	Add the mask body color



**CCQS Certification Services Limited**

Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin15, D15 AKK1, Ireland


Tel: +00 353 1 588 6920 Website: [www.ccqs.co.uk](http://www.ccqs.co.uk) E-mail: [verify@ccqs.ie](mailto:verify@ccqs.ie)

If in any doubt about the integrity of this certificate, please contact CCQS by email to verify.

**EU Declaration of Conformity**  
**Annex IX PPE Regulation (EU) 2016/425**

This EU Declaration of conformity refers to the following products:

1. Product info  
Name: Particle filtering half mask  
Model: KADI-001  
Classification: FFP2 NR  
**Batch No.: M20201102**
2. The Manufacturer's name and address is as follows:  
Name: Hefei Kadi Biological Pharmaceutical Co., Ltd.  
Address: 2<sup>nd</sup> Floor, No.3 Building, Workshop 3, Xiwei San Rd., Feidong Economic Development Zone, 231600, Hefei, Anhui, China
3. This Declaration of Conformity is issued under the sole responsibility of the Manufacturer.
4. Detailed description of the PPE to allow traceability/identification of the PPE.  
KADI-001  
BLACK folding particle filtering half mask without valve, internal metal nose clip

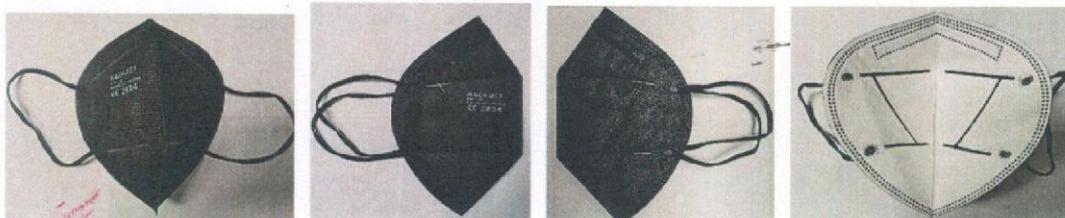

The article identified in (4) above is in conformance with the relevant Union Harmonization Legislation Regulation (EU) 2016/425.

References to the relevant harmonized standards used, including the date of the standard, or references to the other technical specifications, including the date of the specification, in relation to which conformity is declared:

**EN 149:2001+A1:2009**

CCQS Certification Services Limited. (NB 2834) performed the EU Type Examination (Module B) and issued the Type Examination Certificate Number: Module B

No.	EU Type Examination (Module B) Certificate Number
1	CE-PC-200401-179-01-9C

Product Category:

This product is Category III and is subject to Module C2 internal production control plus supervised product checks at random intervals and is under the surveillance of CCQS Certification Services Limited. (NB 2834)

This product is Category III and is subject to Module D Conformity to type based on quality assurance of the production process and is under the surveillance of CCQS Certification Services Limited. (NB 2834)

Signature: \_\_\_\_\_

Date: 2020/11/20


Company stamp and/or legal signature: \_\_\_\_\_



**EU Declaration of Conformity**  
**Annex IX PPE Regulation (EU) 2016/425**

This EU Declaration of conformity refers to the following products:

1. Product info  
Name: Particle filtering half mask  
Model: KADI-001  
Classification: FFP2 NR  
**Batch No.: M20201102**
2. The Manufacturer's name and address is as follows:  
Name: Hefei Kadi Biological Pharmaceutical Co., Ltd.  
Address: 2<sup>nd</sup> Floor, No.3 Building, Workshop 3, Xiwei San Rd., Feidong Economic Development Zone, 231600, Hefei, Anhui, China
3. This Declaration of Conformity is issued under the sole responsibility of the Manufacturer.
4. Detailed description of the PPE to allow traceability/identification of the PPE.  
KADI-001  
BLUE folding particle filtering half mask without valve, internal metal nose clip

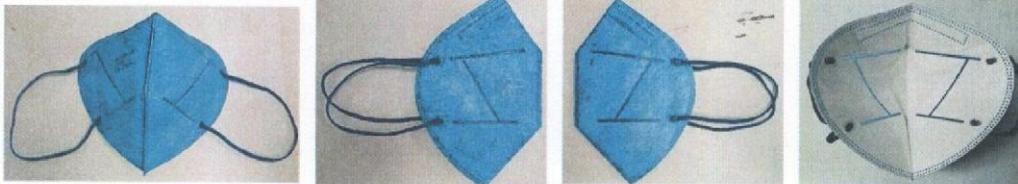

The article identified in (4) above is in conformance with the relevant Union Harmonization Legislation Regulation (EU) 2016/425.

References to the relevant harmonized standards used, including the date of the standard, or references to the other technical specifications, including the date of the specification, in relation to which conformity is declared:

**EN 149:2001+A1:2009**

CCQS Certification Services Limited. (NB 2834) performed the EU Type Examination (Module B) and issued the Type Examination Certificate Number: Module B

No.	EU Type Examination (Module B) Certificate Number
1	CE-PC-200401-179-01-9C

Product Category:

This product is Category III and is subject to Module C2 internal production control plus supervised product checks at random intervals and is under the surveillance of CCQS Certification Services Limited. (NB 2834)

This product is Category III and is subject to Module D Conformity to type based on quality assurance of the production process and is under the surveillance of CCQS Certification Services Limited. (NB 2834)

Signature: \_\_\_\_\_

Date: 2020/11/20


Company stamp and/or legal signature: \_\_\_\_\_



**EU Declaration of Conformity**  
**Annex IX PPE Regulation (EU) 2016/425**

This EU Declaration of conformity refers to the following products:

1. Product info  
Name: Particle filtering half mask  
Model: KADI-001  
Classification: FFP2 NR  
**Batch No.: M20201102**
2. The Manufacturer's name and address is as follows:  
Name: Hefei Kadi Biological Pharmaceutical Co., Ltd.  
Address: 2<sup>nd</sup> Floor, No.3 Building, Workshop 3, Xiwei San Rd., Feidong Economic Development Zone, 231600, Hefei, Anhui, China
3. This Declaration of Conformity is issued under the sole responsibility of the Manufacturer.
4. Detailed description of the PPE to allow traceability/identification of the PPE.  
KADI-001  
GREY folding particle filtering half mask without valve, internal metal nose clip

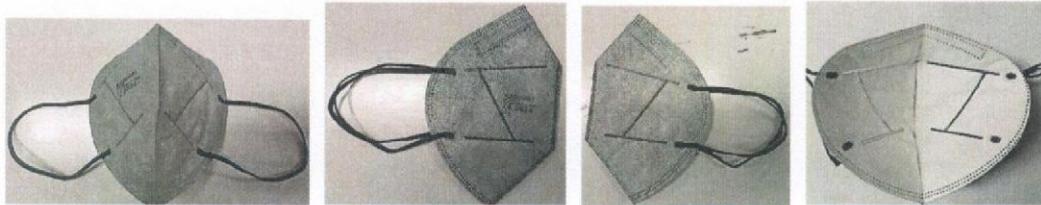

The article identified in (4) above is in conformance with the relevant Union Harmonization Legislation Regulation (EU) 2016/425.

References to the relevant harmonized standards used, including the date of the standard, or references to the other technical specifications, including the date of the specification, in relation to which conformity is declared:

**EN 149:2001+A1:2009**

CCQS Certification Services Limited. (NB 2834) performed the EU Type Examination (Module B) and issued the Type Examination Certificate Number: Module B

No.	EU Type Examination (Module B) Certificate Number
1	CE-PC-200401-179-01-9C

Product Category:

This product is Category III and is subject to Module C2 internal production control plus supervised product checks at random intervals and is under the surveillance of CCQS Certification Services Limited. (NB 2834)

This product is Category III and is subject to Module D Conformity to type based on quality assurance of the production process and is under the surveillance of CCQS Certification Services Limited. (NB 2834)

Signature: \_\_\_\_\_

Date: 2020/11/20


Company stamp and/or legal signature: \_\_\_\_\_



**EU Declaration of Conformity**  
**Annex IX PPE Regulation (EU) 2016/425**

This EU Declaration of conformity refers to the following products:

1. Product info  
Name: Particle filtering half mask  
Model: KADI-001  
Classification: FFP2 NR  
**Batch No.: M20201102**
2. The Manufacturer's name and address is as follows:  
Name: Hefei Kadi Biological Pharmaceutical Co., Ltd.  
Address: 2<sup>nd</sup> Floor, No.3 Building, Workshop 3, Xiwei San Rd., Feidong Economic Development Zone, 231600, Hefei, Anhui, China
3. This Declaration of Conformity is issued under the sole responsibility of the Manufacturer.
4. Detailed description of the PPE to allow traceability/identification of the PPE.  
KADI-001  
PINK folding particle filtering half mask without valve, internal metal nose clip

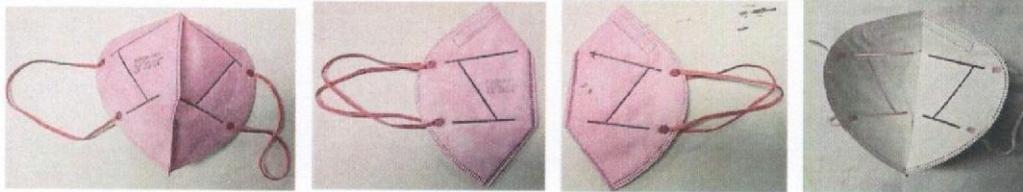

The article identified in (4) above is in conformance with the relevant Union Harmonization Legislation Regulation (EU) 2016/425.

References to the relevant harmonized standards used, including the date of the standard, or references to the other technical specifications, including the date of the specification, in relation to which conformity is declared:

**EN 149:2001+A1:2009**

CCQS Certification Services Limited. (NB 2834) performed the EU Type Examination (Module B) and issued the Type Examination Certificate Number: Module B

No.	EU Type Examination (Module B) Certificate Number
1	CE-PC-200401-179-01-9C

Product Category:


This product is Category III and is subject to Module C2 internal production control plus supervised product checks at random intervals and is under the surveillance of CCQS Certification Services Limited. (NB 2834)

This product is Category III and is subject to Module D Conformity to type based on quality assurance of the production process and is under the surveillance of CCQS Certification Services Limited. (NB 2834)

Signature: \_\_\_\_\_

Date: 2020/11/20


Company stamp and/or legal signature: \_\_\_\_\_



**EU Declaration of Conformity**  
**Annex IX PPE Regulation (EU) 2016/425**

This EU Declaration of conformity refers to the following products:

1. Product info  
Name: Particle filtering half mask  
Model: KADI-001  
Classification: FFP2 NR  
**Batch No.: M20201102**
2. The Manufacturer's name and address is as follows:  
Name: Hefei Kadi Biological Pharmaceutical Co., Ltd.  
Address: 2<sup>nd</sup> Floor, No.3 Building, Workshop 3, Xiwei San Rd., Feidong Economic Development Zone, 231600, Hefei, Anhui, China
3. This Declaration of Conformity is issued under the sole responsibility of the Manufacturer.
4. Detailed description of the PPE to allow traceability/identification of the PPE.  
KADI-001  
White folding particle filtering half mask without valve, internal metal nose clip

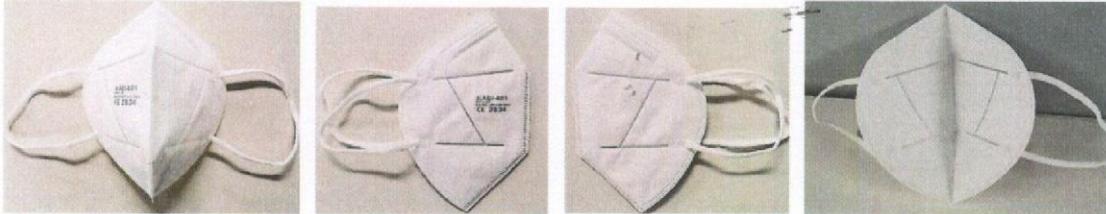

The article identified in (4) above is in conformance with the relevant Union Harmonization Legislation Regulation (EU) 2016/425.

References to the relevant harmonized standards used, including the date of the standard, or references to the other technical specifications, including the date of the specification, in relation to which conformity is declared:

**EN 149:2001+A1:2009**

CCQS Certification Services Limited. (NB 2834) performed the EU Type Examination (Module B) and issued the Type Examination Certificate Number: Module B

No.	EU Type Examination (Module B) Certificate Number
1	CE-PC-200401-179-01-9C

Product Category:


This product is Category III and is subject to Module C2 internal production control plus supervised product checks at random intervals and is under the surveillance of CCQS Certification Services Limited. (NB 2834)

This product is Category III and is subject to Module D Conformity to type based on quality assurance of the production process and is under the surveillance of CCQS Certification Services Limited. (NB 2834)

Signature: \_\_\_\_\_

Date: 2020/11/20

Company stamp and/or legal signature: \_\_\_\_\_





中国认可  
国际互认  
检测  
TESTING  
CNAS L1499

National Quality Supervision and Testing Center for Personal  
Protective Equipment (Beijing)  
(Testing Laboratory for Labour Protection Products of Beijing  
Municipal Institute for Labour Protection)

No.55 Taoranting Street, Xicheng District, Beijing, China.  
Phone: +86 10 63519250 +86 10 63520770 +86 10 83530311  
Fax: +86 10 63519250 +86 10 63520770

The Testing Center is accredited for compliance with ISO/IEC 17025.

The results of tests, calibrations and/or measurements included in this document are traceable to Chinese/national standards.

CNAS is a signatory to the ILAC mutual recognition arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

## TEST REPORT

### Particulate respirator-half facepiece

EN 149: 2001 +A1: 2009 Respiratory protective devices — Filtering half masks to protect against particles —  
Requirements, testing, marking

**Product:** Particle filtering half mask  
**Report No:** 2020 (D) - 0778  
**Client:** CCQS Certification Services Limited  
**Model (s):** KADI-001  
**Date(s) of tests:** 2020.05.19-2020.06.03

## DESCRIPTION OF SAMPLES

General Information	Classification	Main Components
<b>Manufacturer</b>	FFP2 NR	White folding mask
<b>Manufacturer Address</b>	Hefei Kadi Biological Pharmaceutical Co., Ltd 2 <sup>nd</sup> Floor, No 3 Building, Workshop 3, Xiwen San Rd, Feidong Economic Development Zone, 231600, Hefei, Anhui, China.	

Signed:

Issued: 2020.6.3

陈倬为 Chen Zhuowei  
Authorized Signatory, Lab Director

Page 1 of 10

**Conditions:**

The test results presented in this report relate to the samples tested only.

This report may be reproduced and distributed to your clients, provided that it is reproduced and distributed in full.

The authenticity of this test report and its contents can be verified by contacting the laboratory.

---

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

## Test Results

---

<p><b>7.3 Visual inspection</b></p> <p>The visual inspection shall include the marking and information supplied by the manufacturer.</p> <p><b>Note1: As requested by the client, marking and information supplied by the manufacturer was not inspected.</b></p>	<b>Not tested<sup>1</sup></b>						
<p><b>7.4 Package</b></p> <p>Particle filtering half masks shall be offered for sale packaged in such a way that they are protected against mechanical damage and contamination before use.</p> <p><b>Note2: In accordance with the requirement.</b></p>	<b>Pass<sup>2</sup></b>						
<p><b>7.5 Material</b></p> <p>Materials used shall be suitable to withstand handling and wear over the period for which the particle filtering half mask is designed to be used.</p> <p>Any material from the filter media released by the air flow through the filter shall not constitute a hazard or nuisance for the wearer.</p> <p>After undergoing the conditioning described in 8.3.1 none of the particle filtering half masks shall have suffered mechanical failure of the facepiece or straps.</p> <p>When conditioned in accordance with 8.3.1 and 8.3.2 the particle filtering half mask shall not collapse.</p> <p><b>Note3: No mechanical failure after undergoing the conditioning described in 8.3.1. No collapse when conditioned in accordance with 8.3.1 and 8.3.2.</b></p>	<b>Pass<sup>3</sup></b>						
<p><b>7.6 Cleaning and disinfecting</b></p> <p>If the particle filtering half mask is designed to be re-usable, the materials used shall withstand the cleaning and disinfecting agents and procedures to be specified by the manufacturer.</p> <p><b>Note4: Single shift use only.</b></p>	<b>N/A<sup>4</sup></b>						
<p><b>7.7 Practical performance</b></p> <p>The particle filtering half mask shall undergo practical performance tests under realistic conditions.</p> <p><b>Note5: No imperfections.</b></p>	<b>Pass<sup>5</sup></b>						
<p><b>7.8 Finish of parts</b></p> <p>Parts of the device likely to come into contact with the wearer shall have no sharp edges or burrs.</p> <p><b>Note6: No sharp edges or burrs.</b></p>	<b>Pass<sup>6</sup></b>						
<p><b>7.9.1 Total inward leakage</b></p> <p>For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than: 25% for FFP1, 11% for FFP2, 5% for FFP3</p> <p>and, in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than 22% for FFP1, 8% for FFP2, 2% for FFP3</p> <p><b>Note7: FFP2 respirator. Test results are shown in Annex A Table 7.9.1-A&amp;B.</b></p>	<b>Pass<sup>7</sup></b>						
<p><b>7.9.2 Penetration of filter material</b></p> <p>The penetration of the filter of the particle filtering half mask shall meet the requirements of Table 1.</p> <table border="0" style="width: 100%; margin-left: 20px;"> <tr> <td style="width: 15%;"></td> <td style="width: 40%;">Sodium chloride test 95 l/min</td> <td style="width: 45%;">Paraffin oil test 95 l/min</td> </tr> <tr> <td>FFP1</td> <td style="text-align: center;">≤20%</td> <td style="text-align: center;">≤20%</td> </tr> </table>		Sodium chloride test 95 l/min	Paraffin oil test 95 l/min	FFP1	≤20%	≤20%	<b>Pass<sup>8</sup></b>
	Sodium chloride test 95 l/min	Paraffin oil test 95 l/min					
FFP1	≤20%	≤20%					
<p>This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.</p>							

FFP2	≤6%	≤6%
FFP3	≤1%	≤1%

**Note8: FFP2 respirator. Test results are shown in Annex A Table 7.9.2.**

### 7.10 Compatibility with skin

**Pass<sup>9</sup>**

Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.

**Note9: No irritation or any other adverse effect to health.**

### 7.11 Flammability

**Pass<sup>10</sup>**

When tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5 s after removal from the flame.

**Note10: Test results are shown in Annex A Table 7.11.**

### 7.12 Carbon dioxide content of the inhalation air

**Pass<sup>11</sup>**

The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0 % (by volume)

**Note11: Test results are shown in Annex A Table 7.12.**

### 7.13 Head harness

**Pass<sup>12</sup>**

The head harness shall be designed so that the particle filtering half mask can be donned and removed easily. The head harness shall be adjustable or self-adjusting and shall be sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.

**Note12: Head harness can be donned and removed easily, adjustable or self-adjusting and have sufficiently robust to hold the particle filtering half mask firmly.**

### 7.14 Field of vision

**Pass<sup>13</sup>**

The field of vision is acceptable if determined so in practical performance tests.

**Note13: Pass the practical performance tests.**

### 7.15 Exhalation valve

**N/A<sup>14</sup>**

A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.

If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.

Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.

When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10 N applied for 10 s.

**Note14: No exhalation valve.**

### 7.16 Breathing resistance

**Pass<sup>15</sup>**

Classification	Maximum permitted resistance (mbar)		
	Inhalation		Exhalation
	30 l/min	95 l/min	160 l/min
FFP1	0.6	2.1	3.0
FFP2	0.7	2.4	3.0
FFP3	1.0	3.0	3.0

**Note15: FFP2 respirator. Test results are shown in Annex A Table 7.16.**

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

**7.17 Clogging**N/A<sup>16</sup>**7.17.2 Breathing resistance**

Valved particle filtering half masks:

After clogging the inhalation resistances shall not exceed:

FFP1: 4 mbar, FFP2: 5 mbar, FFP3: 7 mbar at 95L/min continuous flow

The exhalation resistance shall not exceed 3 mbar at 160 L/min continuous flow

Valveless particle filtering half masks

After clogging the inhalation and exhalation resistances shall not exceed:

FFP1: 3 mbar, FFP2: 4 mbar, FFP3: 5 mbar at 95L/min continuous flow

**7.17.3 Penetration of filter material**

	Sodium chloride test 95 l/min	Paraffin oil test 95 l/min
FFP1	≤20%	≤20%
FFP2	≤6%	≤6%
FFP3	≤1%	≤1%

**Note16: Single shift use only.**

**7.18 Demountable parts**Pass<sup>17</sup>

All demountable parts (if fitted) shall be readily connected and secured, where possible by hand

**Note17: In accordance with the requirement.**

**9 Marking**

Not tested

**9.1 Packaging**

The following information shall be clearly and durably marked on the smallest commercially available packaging or legible through it if the packaging is transparent.

**9.1.1** The name, trademark or other means of identification of the manufacturer or supplier.

**9.1.2** Type-identifying marking.

**9.1.3** Classification

The appropriate class (FFP1, FFP2 or FFP3) followed by a single space and then: "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable. Example: FFP2 R D.

**9.1.4** The number and year of publication of this European Standard.

**9.1.5** At least the year of end of shelf life. The end of shelf life may be informed by a pictogram as shown in Figure 12a, where yyyy/mm indicates the year and month.

**9.1.6** The sentence 'see information supplied by the manufacturer', at least in the official language(s) of the country of destination, or by using the pictogram as shown in Figure 12b.

**9.1.7** The manufacturer's recommended conditions of storage (at least the temperature and humidity) or equivalent pictogram, as shown in Figures 12c and 12d.

**9.1.8** The packaging of those particle filtering half masks passing the dolomite clogging test shall be additionally marked with the letter "D". This letter shall follow the classification marking preceded by a single space.

**9.2 Particle filtering half mask**

Particle filtering half masks complying with this European Standard shall be clearly and durably marked with the following:

**9.2.1** The name, trademark or other means of identification of the manufacturer or supplier.

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

**9.2.2** Type-identifying marking.

**9.2.3** The number and year of publication of this European Standard.

**9.2.4** Classification

The appropriate class (FFP1, FFP2 or FFP3) followed by a single space and then: "NR" if the particle filtering half mask is limited to single shift use only. Example: FFP3 NR, or "R" if the particle filtering half mask is re-usable. Example: FFP2 R D.

**9.2.5** If appropriate the letter D (dolomite) in accordance with clogging performance. This letter shall follow the classification marking preceded by a single space

**9.2.6** Sub-assemblies and components with considerable bearing on safety shall be marked so that they can be identified.

---

### **End of Test Results**

---

**Annex A: Summarization of Test Data****Table 7.9.1-A Inward leakage test data**

Test specification: EN 149-2001 Clause 8.5

Subject	Sample No.	Condition	Walk(%)	Head Side/side(%)	Head up/down(%)	Talk(%)	Walk(%)	Mean(%)
Yi	1	A.R.	7.13	7.16	7.14	7.56	7.45	7.3
Gong	2	A.R.	6.89	7.03	6.97	7.17	7.03	7.0
Yu	3	A.R.	7.09	7.67	7.38	7.19	7.47	7.4
Hu	4	A.R.	6.86	6.93	7.23	6.89	7.21	7.0
Xu	5	A.R.	7.18	7.57	7.47	7.39	7.53	7.4
Deng	6	T.C.	9.35	9.48	9.46	9.52	9.74	9.5
Zhang	7	T.C.	6.79	7.04	7.28	6.90	7.01	7.0
Zhi	8	T.C.	7.08	7.51	7.24	7.30	7.41	7.3
Fang	9	T.C.	6.72	6.76	6.89	6.86	7.09	6.9
Lv	10	T.C.	8.37	8.52	8.86	8.68	8.62	8.6
All <u>50</u> individual exercise results were not greater than <u>11</u> % 8 out of <u>10</u> individual wearer arithmetic means were not greater than <u>8</u> %							Pass	

**Table 7.9.1-B Facial dimension**

Subject	Face length	Face Width	Face Depth	Mouth Width
Yi	120	130	109	59
Gong	122	140	115	65
Yu	119	160	139	55
Hu	112	122	119	63
Xu	110	130	118	60
Deng	115	119	110	59
Zhang	112	123	113	55
Liu	103	130	100	50
Zhi	118	139	130	63
Fang	115	129	120	50
Chen	116	150	132	56
Lv	110	121	110	53

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

**Table -7.9.2 Penetration of filter material**

Test specification: EN 149-2001 Clause 8.11

Aerosol	Condition	Sample No.	Penetration (%)	Assessment
Sodium chloride test	As received	11	0.482	Pass
		12	0.579	
		13	0.414	
	Simulated wearing treatment	14	0.565	
		15	0.682	
		16	0.595	
	Mechanical strength+ Temperature conditioned	17	0.772	
		18	0.841	
		19	0.714	
Paraffin oil test	As received	20	4.61	
		21	4.55	
		22	4.76	
	Simulated wearing treatment	23	4.92	
		24	4.88	
		25	5.19	
	Mechanical strength+ Temperature conditioned	26	5.27	
		27	5.44	
		28	5.31	
Flow conditioning: Single filter: 95.0 L/min				

**Table 7.11 Flammability**

Test specification: EN 149-2001 Clause 8.6

Condition	Sample No.	Result	Assessment
As received	29	Burn for 1 s	Pass
	30	Burn for 1 s	
Temperature conditioned	31	Burn for 1 s	
	32	Burn for 1 s	

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.

**Table 7.12 Carbon dioxide content of the inhalation air**

Test specification: EN 149-2001 Clause 8.7

Condition	Sample No.	Result	Assessment
As received	33	0.39%	Mean value 0.4%
	34	0.41%	
	35	0.40%	

**Table 7.16 Breathing resistance (mbar)**


Test specification: EN 149-2001 Clause 8.9

	Flow rate	36					37					38					
		A	B	C	D	E	A	B	C	D	E	A	B	C	D	E	
As received	Inhalation	30 l/min	0.4	0.5	0.5	0.5	0.5	0.6	0.5	0.6	0.4	0.5	0.5	0.6	0.6	0.5	0.4
		95 l/min	1.6	1.6	1.8	1.6	1.8	1.7	1.7	1.8	1.6	1.6	1.8	1.7	1.6	1.8	1.7
	Exhalation	160 l/min	1.9	2.1	1.9	1.9	2.1	1.9	2.0	2.1	2.0	2.1	2.1	2.0	2.0	2.1	2.1
Simulated wearing treatment	Inhalation	30 l/min	0.6	0.6	0.6	0.4	0.5	0.5	0.6	0.4	0.5	0.4	0.6	0.5	0.5	0.5	0.5
		95 l/min	1.8	1.8	1.8	1.8	1.7	1.6	1.7	1.7	1.7	1.8	1.6	1.8	1.7	1.6	1.7
	Exhalation	160 l/min	2.1	2.0	2.0	2.0	2.0	1.9	2.0	2.1	2.0	2.0	2.0	2.0	1.9	2.1	2.0
Temperature conditioned	Inhalation	30 l/min	0.6	0.4	0.5	0.5	0.4	0.4	0.4	0.4	0.5	0.4	0.5	0.4	0.6	0.6	0.4
		95 l/min	1.7	1.8	1.6	1.7	1.8	1.8	1.7	1.8	1.8	1.8	1.7	1.7	1.7	1.6	1.7
	Exhalation	160 l/min	2.1	1.9	2.0	2.0	2.0	2.1	2.0	2.0	2.0	1.9	1.9	2.1	2.0	2.0	2.0
Assessment	Pass																

A: facing directly ahead; B: facing vertically upwards; C: facing vertically downwards; D: lying on the left side; E: lying on the right side

**End of Annex A**

**ANNEX B PHOTOS OF SAMPLES**

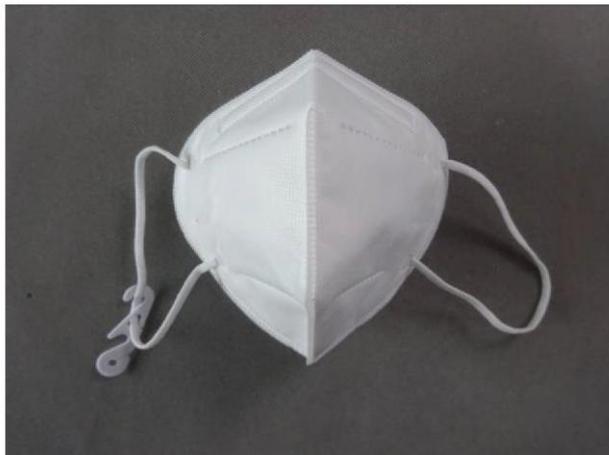

**End of Annex B**

---

This report may not be published except in full unless permission for the publication of an approved extract has been obtained in writing.